




LOCATING SPRING PINS

Specifications

TYPE	SIZE	QTY	INSTALLATION
StdA0403		100 - 400 500 - 900 1000 & up	<p>Drill hole for tight fit and drive pin in with hollow tube</p>
B			
StdA0407		100 - 400 500 - 900 1000 & up	
S			
StdA0411		100 - 400 500 - 900 1000 & up	
M			
StdA0415		100 - 400 500 - 900 1000 & up	<p>1/2" PROTRUDES THRU BOTTOM WHEN DEPRESSED</p>
L			
StdA1363		100 - 400 500 - 900 1000 & up	
C			

Each pin type is packaged and sold in multiples of 100. Pins are manufactured from steel with stainless steel springs. One free sample pin may be requested on your letterhead.

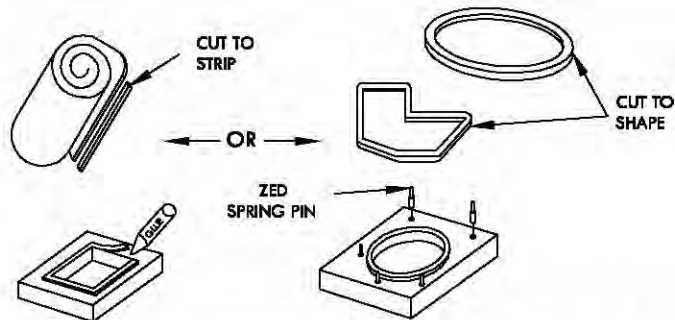

Description	Size	Thickness
HEAT SEALER PADS:		
Cork pad	36" x 36"	1/8"
Rubber sponge pad	18" x 36"	1/8" 3/16" 1/4"
Silicone rubber	18" x 36"	1/8"
RELEASE MATERIAL:		
Teflon coated glass cloth	36" x 36"	.003" .005" .010"

ASK ABOUT STEEL RULE DIES

Ordering Information

SHIPPING & HANDLING FEE:
COD and Open Account orders billed at actual.
All prices subject to change without notice

ZED INDUSTRIES, INC.
3580 Lightner Road
Vandalia, OH 45377

TEL (937) 667-8407
FAX (937) 667-3340

MINIMUM ORDER:
Fifty Five Dollars (\$55.00) minimum order

TERMS:
Established credit accounts - Net 30 days
All others - COD or Credit Card